
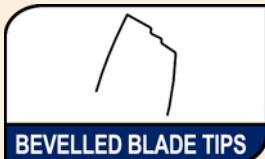


Fan  
Lüfter  
Ventilador  
Ventilateur

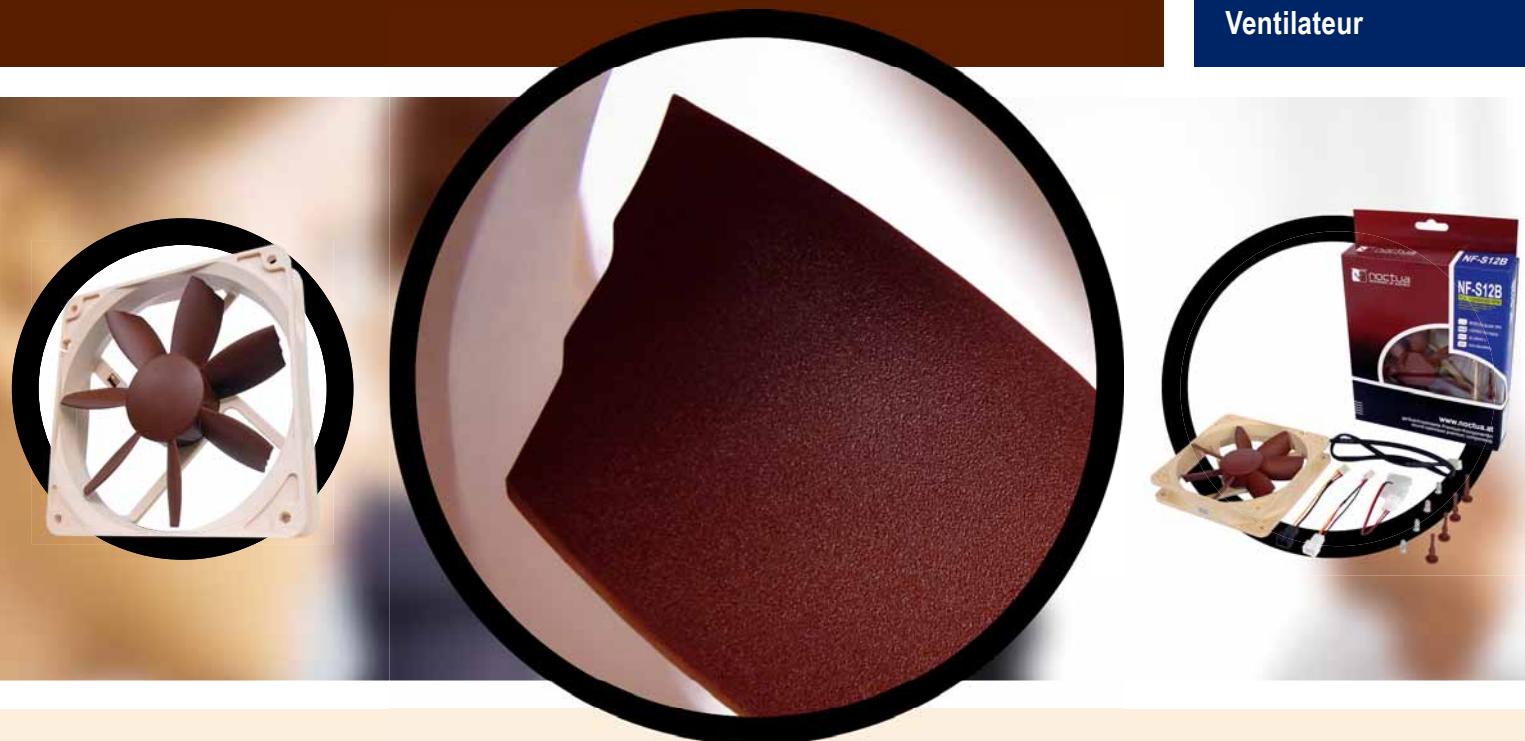

**BEVELLED BLADE TIPS**


Highly optimised impeller with Bevelled Blade Tips

Thanks to its further refined blade geometry with extended leading edges and Bevelled Blade Tips, the NF-S12B achieves up to 10% more airflow and static pressure than its much acclaimed predecessor at the same noise level



3 speed settings for full flexibility

Providing 1200, 900 and 600 rpm speed settings via the supplied Low-Noise and Ultra-Low-Noise Adapters, the FLX (Flexibility) version can be fine-tuned for superior airflow or maximum quietness.

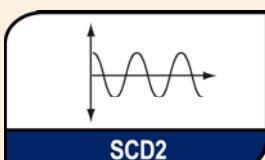

**SCD2**

**Smooth Commutation Drive 2**

The latest version of Noctua's advanced SCD drive system ensures superb running smoothness by eliminating torque variations and switching noises.



**SSO-BEARING**

**SSO - Bearing**

Noctua's time-tested SSO-Bearing technology has become synonymous with supremely quiet operation and exceptional long-term stability.

Size	120 x 120 x 25 mm		
Bearing	SSO-Bearing		
Blade Geometry	NF-S12B Blade Design with BBT		
Input Power	1.2 W		
Input Current	0.1 A		
Voltage Range	12 V		
MTBF	> 150.000 h		

Specifications	Standard	with L.N.A.	with U.L.N.A.
Rotational Speed +/-10%	1200 RPM	900 RPM	600 RPM
Airflow	100.6 m³/h	75.8 m³/h	49.2 m³/h
Acoustical Noise	18.1 dB(A)	10.6 dB(A)	6.2* dB(A)
Static Pressure	1.31 mmH <sub>2</sub> O	0.76 mmH <sub>2</sub> O	0.34 mmH <sub>2</sub> O

\*extrapolated values

**Product**  
**Noctua NF-S12B FLX**

**Warranty**

**6 Years**

Packaging Type      Pcs./Colli

**Retail**      **40**

**Scope of Delivery**

- Ultra-Low-Noise Adapter(U.L.N.A.)
- Low-Noise Adapter (L.N.A.)
- 4 Vibration Compensators
- 3:4-Pin Adapter
- Screws