

MAINBOARD

P67A-GD80 (B3)




- Support Intel 2nd Generation Core i7 / i5 / i3 Series Processors in LGA 1155 Package
- 12 Phase DrMOS/ 6 pin VGA power connector
- Support Super Charger/ ClickBIOS/ THX

Key Features


Military Class II

- Hi-c Cap: Tantalum Core, higher reliability & longer lifetime than solid cap
- SFC: 30% higher current capacity
- All Solid Cap: 10 years ultra long lifetime

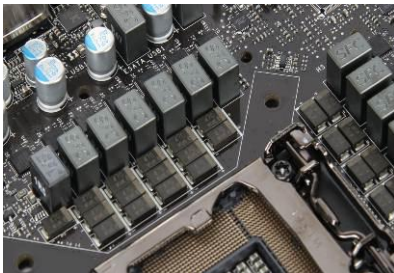


3 sets PCI-E 2.0 x16 slots

- Support 3 dual-slot graphics cards
- NVIDIA SLI & ATI CrossFireX ready
- Flexible Multi-GPU configuration
- For extreme gamers

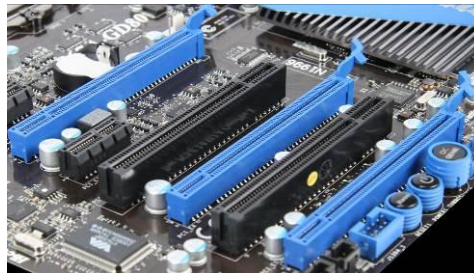

OC Genie II

- Intelligently detect hardware setting
- Auto overclock CPU & memory in 1 second
- Increase CPU performance to 4.2GHz

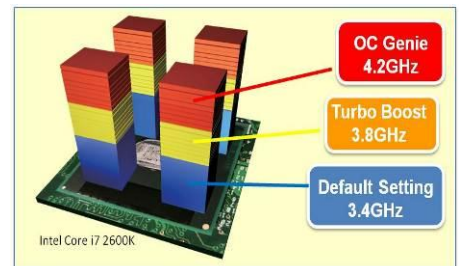

Specifications



| | |
|-----------------------|---|
| Processor | Intel 2 nd generation Core i7/ i5/ i3 & Pentium/Celeron processor in a LGA 1155 socket |
| Chipset | 3 x PCI Express 2.0 x16 slots |
| Memory | 4 DIMMs support for DDR3-2133(OC)/ 1866(OC)/ 1600(OC)/ 1333/ 1066MHz up to 32GB max |
| Audio | 8-channel (7.1) HD Audio subsystem with S/PDIF out THX TruStudio Pro |
| LAN | 10/100/1000 Mb/s LAN subsystem |
| Peripheral interfaces | <ul style="list-style-type: none"> • 4 x SATA 3Gb/s ports from P67 with RAID support • 2 x SATA 6Gb/s ports from P67 with RAID support • 2 x eSATA ports from Marvell® 88SE9128 • 2 x IEEE 1394 ports • 10 x USB 3.0 ports(6 external / 4 internal) • 10 x USB 2.0 ports (4 external / 6 internal) • 2 x PCI-E x1 ports • 2 x PCI ports |