


# Wallbracket LCD-TV 23/26/32/40 X99249 mounting instructions

## Box contains:



Wall bracket - 1 pcs



Vertical plate incl hook - 2 pcs


Plastic bag

Hardware set for mounting of LCD/TFT screen - 1 pcs



## Step 1:

## INSTRUCTIONS:

1. Make sure that the bracket is placed horizontally by using a carpenter's level on the upper edge of the bracket.
2. Hold the bracket against the wall and mark four drilling holes, drill holes in the wall and tighten the bracket with your wall suitable screws. The diameter of the screws needs to be max 6 mm.
3. Tilt the bracket forward and secure the tilt with 2 pcs M6x20 screws.
4. Mount the bracket with screws appropriate to type of foundation (screws not included).

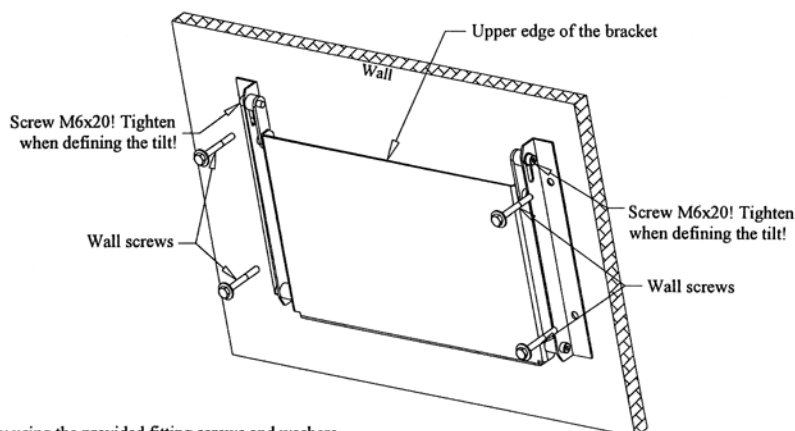

- Step 2:**  
1. Place the Vertical Plates of the back of the screen's chassis and fasten them by using the provided fitting screws and washers.  
**Important!** Make sure that the hook is placed upwards.

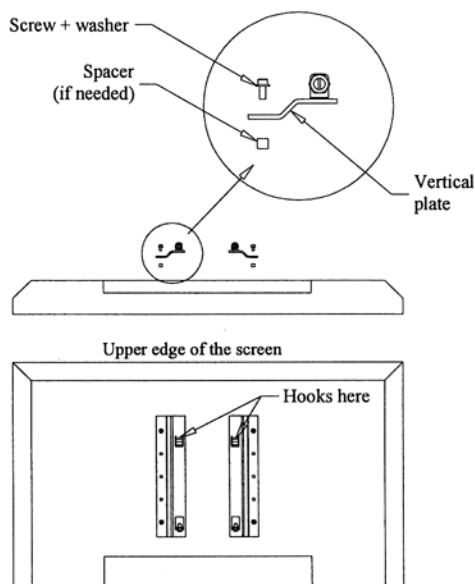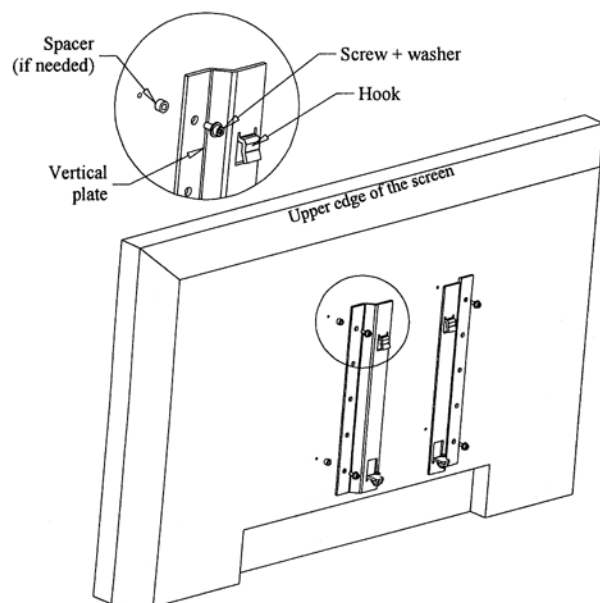

## Step 3:

1. Hang the screen with the mounted plates onto upper edge of the bracket. Make sure that the distance between hook and the side bracket is equal on each side. Press the down part of the screen towards the bracket, until you hear a "click". Depending on the weight of the screen the spring screws might be to be tighten.

