ToughArmor MB993SK-B

3 YEARS WARRANTY

ICY DOCK®
www.icydock.com

Triple Bay 2.5" to 3.5" SAS/SATA HDD & SSD Mobile Rack

3x 2.5" SAS/SATA HDD — **1 x 3.5" Bay** — **3.5" BAY**

Aluminum Frame
Supports 7mm drive height

FULL METAL CONSTRUCTION

EMI GROUNDING WITH ANTI-VIBRATION DESIGN

EXCELLENT PASSIVE COOLING

HDD POWER | Flashing HDD ACTIVITY | NO HDD (APT)

Supports Locking Latch

#1 - 8 ID plugs are included
1 2 3 4 5 6 7 8
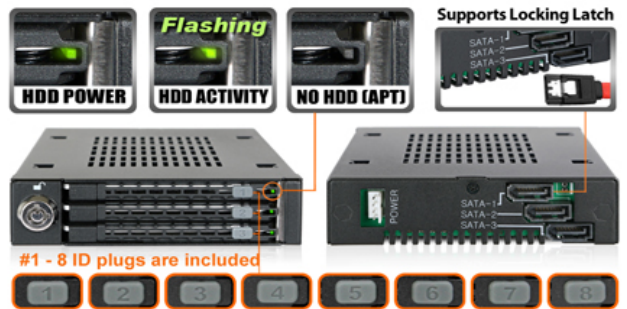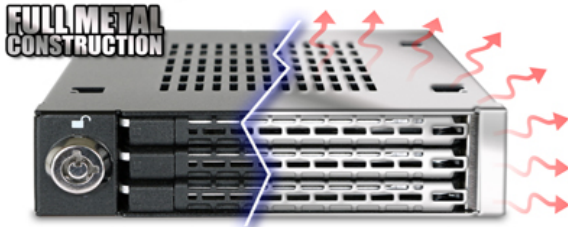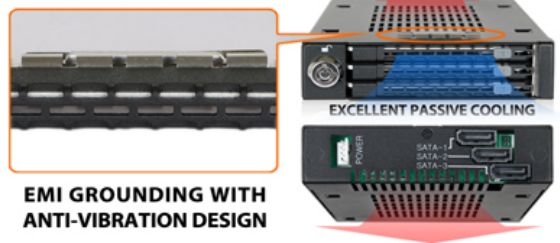
ToughArmor MB993SK-B Features & Specs

- Suggested applications in medical & military systems, government agencies, Industrial PC, SMB workstation, VM workstation, mobile DVR system, aerospace computer, automation system and embedded system.
- Fits 3 x 7mm 2.5" SATA HDD or SSD in a 3.5" floppy drive bay.
- Supports SAS or SATA HDD/SSD at 6Gbps and is backwards compatible with SATA 3Gbps drives and hosts (SAS host is required for SAS drives - Single SAS channel
- Single floppy 4 Pin to power entire device.
- Removable tray system for easy maintenance.
- Full Metal construction, perfect for rugged applications and complies with flammability requirement
- Anti-Vibration Technology (AVT) - creates a safe environment for HDD/SSD
- Active Power Technology (APT) - individual led only powers up if there is drive installed in each bay.
- EMI Grounding – protects hard drives from electrical damage.
- Eagle-hook lock system & 2-segment safeguard key lock keeps drives secure within the enclosure.
- Supports SAS and SATA power cables with locking latch design

Model Number	MB993SK-B
Color	Matte Black
Host Interface	3 x 7pin SATA (Support SAS single channel)
Drive Fit	3 x 2.5" SAS/SATA HDD/SSD
	(SAS host required for SAS drives)
Compatible 2.5" Drive Heights	7mm
Device Fit	1 x 3.5" front device bay
Transfer Rate	Up to 6 Gb/sec. (depending on hard drive speed)
Power Input	1 x Floppy 4 pin power
Insert & Extract connection Via	Direct SAS/ SATA hard drive connection
Structure	Full metal
Drive Cooling	Airflow vents with metal heat dispersion
Power Indicator	Solid green LED
HDD Access Indicator	Flashing green LED
Dimension (L x W x H)	133 x 101.2 x 25.4mm
Weight	370g
Package Contents	Device, user manual, key and screws