


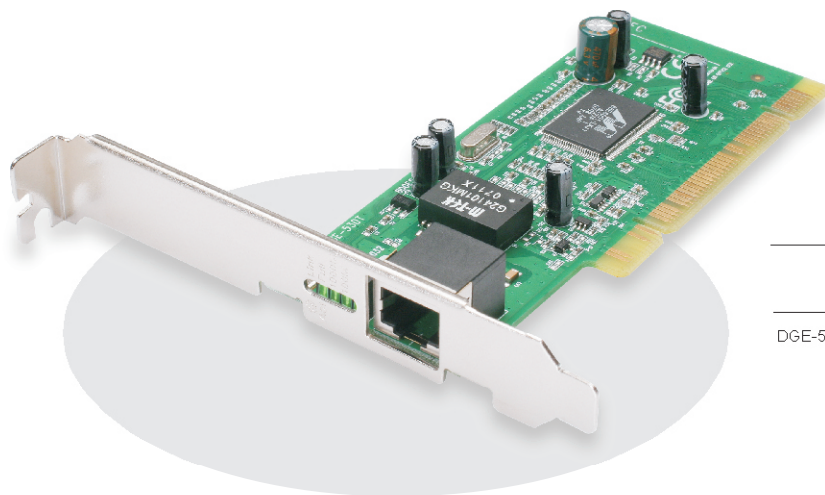

DGE-530T

DGE-530T copper Gigabit PCI card for desktop PC

10/100/1000Mbps Copper Gigabit PCI Card for PC

The DGE-530T is a 10/100/1000Mbps copper Gigabit PCI card for desktop PC. Installable in a PC equipped with PCI expansion slots, this card turns a desktop computer into a high-bandwidth Gigabit workstation or a server running at 2000Mbps full-duplex speed.

High-performance Gigabit Speed

Capable of running at full-duplex Gigabit speed, this card gives your PC 2000Mbps data transmission on your existing Cat. 5 twisted-pair network cable. As an inexpensive alternative solution to fiber-optic, the card allows you to instantly upgrade to Gigabit without requiring you to install new, expensive fiber cables. The card supports 10/100/1000Mbps network speed auto-sensing and full/half duplex auto-negotiation.

VLAN to Improve Performance and Security

The card provides on-board screening of VLANs Tagged Ethernet frames, allowing your PC to be configured with a VLAN-supported switch. Your PC can be part of a VLAN network, where domains are segmented up to enhance performance and security.

Flow Control to Minimize Packet Loss

The card's embedded flow control and independent FIFO for each port provide a means to protect against possible data loss during transmission on the network. When connected to a Gigabit switch Supporting flow control, the card receives signals from the switch regarding buffer overrun during peak usage periods. The card then delays transmission until the switch is ready again to accept new data.

Small Form Factor, Lower Power Requirement

Using a single chip solution, this card is very small in size and consumes very little power of your computer system.

802.1p Priority Queues Support for Quality of Service

This card supports 802.1p standard packet prioritization. When the card is connected to an Ethernet switch that also supports this function, if you enable this function on the DGE-530T card, data outflow from your computer to the switch will be queued for transmission on the network. This permits your computer to run smoothly bandwidth-sensitive audio/video streaming applications and on-line games, where packets are delivered at best-effort speeds.

ACPI 2.0 Wake-On-LAN for Power Management Support

The card supports Wake-On-LAN (WOL) Advanced Configuration Power Interface (ACPI) function, allowing the computer to be powered ON or OFF from a remote station. This function allows an administrator to send a Wake-up signal to the DGE-530T. The WOL function provides a great utility for power management of the computer and allows the network administrator to initiate actions at irregular times from distant locations.

Key Features

- Copper Gigabit connection for PC
- 10/100/1000Mbps auto-sensing speeds
- 2000Mbps Gigabit full duplex support
- 32-bit Bus Master operation
- Supports PCI clock speed at 33MHz
- 802.3x Flow Control for fast, reliable data transmission
- Supports ACPI 2.0 WOL power management
- Supports SNMP v.1
- Supports 802.1Q VLAN Tagging
- Supports 802.1p Priority Queues
- PCI 2.2 plug-and-play
- Universal bus 3.3V support
- Operates in Windows, NetWare, Linux and Mac OS environments
- Very small size, very low power consumption

Standards

- IEEE 802.3 10BASE-T Ethernet
- IEEE 802.3u 100BASE-TX Fast Ethernet
- IEEE 802.3ab 1000BASE-T Gigabit Ethernet
- ANSI/IEEE 802.3 NWay auto-negotiation
- PCI local bus 2.2 specifications
- Universal Bus Support 3.3V
- IEEE 802.3x Flow Control
- IEEE 802.1Q VLAN tagging
- IEEE 802.1p Priority Queues

Topology

Star

Protocol

CSMA/CD

Data Transfer Rates

- Ethernet:
 - 10Mbps (half duplex)
 - 20Mbps (full duplex)
- Fast Ethernet:
 - 100Mbps (half duplex)
 - 200Mbps (full duplex)
- Gigabit Ethernet:
 - 2000Mbps (full duplex)

Network Cables

- 10BASE-T:
 - UTP Cat. 3, 4, 5 (100 m max.)
 - EIA/TIA-586 100-ohm STP (100 m max.)
- 100BASE-TX, 1000BASE-T:
 - UTP Cat. 5 (100 m max.)
 - EIA/TIA-568 100-ohm STP (100 m max.)

Diagnostic LED Report

- Link/Active
- Full duplex
- 1000Mbps
- 100Mbps

Flow Control

- IEEE 802.3x flow control per for full duplex
- Back pressure in half duplex

Jumbo Frame Support

- 9KB (max)

System Setup

IRQ

Allocated by system

I/O Address

Allocated by system

Full/half Duplex

- Full duplex only (1000Mbps)
- Full/half duplex (10/100Mbps)

Environmental & Physical

Operating Temperature

0° - 40°C

Storage Temperature

-25° - 55°C

Humidity

5% - 90% non-condensing

Emission

- FCC Class B
- CE Class B
- C-Tick
- BSMI Class B

Network O.S. Support

- Microsoft Windows 98 SE, NT 4.0, ME, 2000, Server 2003, Server 2008, 32-bit XP, 64-bit XP, Vista X64/86
- Novell Netware 4.2, 5.x, 6.x
- Linux kernel 2.2.x, 2.4.x, 2.6.x
- Mac OS 10.2.x, 10.3.x
- DOS ODI client driver
- NDIS 2 driver



D-Link Worldwide Offices

U.S.A	TEL: 1-800-326-1688	FAX: 1-866-743-4905	Bulgaria	TEL: 359 2 958 22 42	FAX: 359 2 958 65 57
Canada	TEL: 1-905-8295033	FAX: 1-905-8295223	Romania	TEL: 40(0)21 320 23 05	FAX: 40(0)21 320 23 07
Europe (U. K.)	TEL: 44-(0)20-8955-9000	FAX: 44-(0)20-8955-9002	Singapore	TEL: 65-6774-6233	FAX: 65-6774-63225
Germany	TEL: 49-(0)6196-77990	FAX: 49-(0)6196-7799300	Australia	TEL: 61-2-8899-1800	FAX: 61-2-8899-1868
France	TEL: 33 (0)1 30 23 86 88	FAX: 33 (0)1 30 23 86 89	India	TEL: 91-22-2652 6696	FAX: 91-22-2652 8914
Netherlands	TEL: 31-(0)10-282-1445	FAX: 31-(0)10-282-1331	Middle East (Dubai)	TEL: 971-4-391-6480	FAX: 971-4-390-8881
Belgium & Luxemburg	TEL: 32(0)2 517 7111	FAX: 32(0)2 517 6500	Egypt	TEL: 202-291-9035	FAX: 202-291-9051
Switzerland	TEL: 41 (0)1 832 11 00	FAX: 41 (0)1 832 11 01	Turkey	TEL: 90-212-289-5659	FAX: 90-212-289-7606
Austria	TEL: 43 (0)1 240 27 270	FAX: 43 (0)1 240 27 271	Iran	TEL: 90-212-289-5659	FAX: 90-212-289-7606
Sweden	TEL: 46-(0)8 564 619 00	FAX: 46-(0)8 564 619 01	Pakistan	TEL: 92-21-454-8158	FAX: 92-21-453-5103
Denmark	TEL: 45-43-969040	FAX: 45-43-424347	Israel	TEL: 972-9-9715700	FAX: 972-9-9715601
Norway	TEL: 47 99 300 100	FAX: 47 22 30 90 85	Latin America	TEL: 56-2-5838-950	FAX: 56-2-5838-953
Finland	TEL: 358-10 309 8840	FAX: 358-10 309 8841	Brazil	TEL: 55-11-2185-9300	FAX: 55-11-2185-9322
Italy	TEL: 39-02-2900-0676	FAX: 39-02-2900-1723	South Africa	TEL: 27-12-665-2165	FAX: 27-12-665-2186
Spain	TEL: 34 93 409 0770	FAX: 34 93 491 0795	Russia	TEL: 7-495-744-0099	FAX: 7-495-744-0099
Portugal	TEL: 351 21 8688493	FAX: 351 21 8622492	Japan	TEL: 81-3-5781-0963	FAX: 81-3-5781-0965
Greece	TEL: 30 210 9914 512	FAX: 30 210 9916902	Korea	TEL: 82-2-890-5498	FAX: 82-2-890-5497
Czech Republic	TEL: 420 224 247 500	FAX: 420 224 234 967	China	TEL: 86-10-58635800	FAX: 86-10-58635799
Hungary	TEL: 36 (0)1 461 30 00	FAX: 36 (0)1 461 30 04	Taiwan	TEL: 886-2-6600-0123	FAX: 886-2-6600-3939
Poland	TEL: 48 (0)22 583 92 75	FAX: 48 (0)22 583 92 76	Headquarters	TEL: 886-2-6600-0123	FAX: 886-2-6600-9898