D-Link®



TREME N[™] PCI EXPRESS DESKTOP ADAPTER

Wirelessly stream HD video, share files, and go online



Get the maximum performance from your desktop adapter



Connects to any standard PCI Express (PCIe) slot



ULTIMATE PERFORMANCE

The DWA-556 D-Link Xtreme N™ PCI Express Desktop Adapter is a draft 802.11n wireless client that delivers unrivaled wireless performance for your PCI Express-enabled desktop computer. The PCI Express interface provides superior performance over a standard PCI interface. This wireless adapter delivers much faster speeds and many times farther range than 802.11g while staying backward compatible with 802.11g and 802.11b networks. Once connected, you can share a high-speed Internet connection, photos, files, music, videos, printers, and storage.

GET CONNECTED, STAY CONNECTED

The Xtreme N™ PCI Express Desktop Adapter is powered by Xtreme N™ technology and boasts three external antennas to provide superior wireless reception in your home or office. This adapter is designed for use in larger homes and offices, or for users running multiple bandwidth-intensive applications. It enables you to simultaneously make or receive Internet phone calls (VoIP), surf the Web, transfer files, and stream High-Definition (HD) media when connected to a draft 802.11n router, such as the DIR-655 router. The DWA-556 adapter supports WEP, WPA™, and WPA2™ encryption that allow you to connect securely to a wireless network

EASY TO SETUP, EASY TO USE

D-Link's Quick Adapter Setup Wizard guides you step-by-step through the installation process. Configure this desktop adapter without having to call a networking expert to help you.

With unmatched wireless performance, reception, and security, the DWA-556 D-Link Xtreme N PCI Express Desktop Adapter is the best choice for easily adding or upgrading wireless connectivity to your PCI Express-enabled desktop computer.



D-Link[®]

DWA-556

WHAT THIS PRODUCT DOES

Connects your PCI Express-enabled desktop computer to a wireless network to access a high-speed Internet connection, transfer files and stream media from greater distances around your entire home or office.


XTREME N™ ADAPTER BENEFITS

- + Delivers much faster speeds and many times farther range than 802.11g.
- Xtreme N[™] technology enables and enhances
 HD video streaming, file sharing, Internet phone calling (VoIP) and web surfing.
- Secure wireless network access using advanced WEP, WPA™, or WPA2™ encryption.
- Easy installation and usage with D-Link's new Quick Adapter Setup Wizard.
- + Backward compatibility with existing 802.11g and 802.11b networks.

PCI EXPRESS BENEFITS

- + Much faster than legacy PCI cards
- Fits any standard PCI Express slot x1, x4, x8 or x16.
- + Offers increased bandwidth and reliability, more functionality than a standard PCI network card.

YOUR NETWORK SETUP

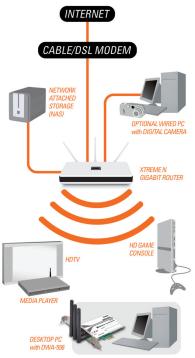

WIRELESS ADAPTER REQUIRED

WIRELESS

N

STANDARDS

- + IEEE 802.11n (draft)
- + IEEE 802.11g
- + IFFF 802 11h

INTERFACE

X1 PCI Express

FREQUENCY RANGE

- + 2.412GHz to 2.462GHz (North America)
- + 2.412GHz to 2.472GHz (General Europe)

DATA RATES 1

- + 802.11q: 6/9/12/18/24/36/48/54Mbps
- + 802.11b: 1/2/5.5/11Mbps
- + 802.11n: 30/60/90/120/180/240/270/300Mbps

EMISSION SCHEMES

+ DSSS_OFDM

Transmit Output Power

17dBm (typical)

SECURITY

- + 64-128-bit Wired Equivalent Privacy (WEP)
- + Wi-Fi Protected Access (WPA & WPA2)

Antonnac

Three 2.0dBi dipole antennas with reverse SMA plugs

RECOMMENDED SYSTEM REQUIREMENTS

For Optimal Wireless Performance: Use with Xtreme N Gigabit Router (DIR-655)

wireless family comparison ngebooster n features • • sustained wireless performance from farther distances recommended applications • high-definition video streaming

MINIMUM SYSTEM REQUIREMENTS

Computer with:

- + Windows® XP or Windows 2000 2
- + CD-ROM

TECHNICAL SPECIFICATIONS

- + 20MB Hard Disk Space
- + x1 PCI Express Slot

LEDs

+ Activity

OPERATING VOLTAGE

3.3 VDC +/- 10%

CURRENT CONSUMPTION

Max. 3.3W

DIMENSIONS

69 x 119.38 x 2.54 mm (2.7 x 4.7 x 0.1 inches)

OPERATING TEMPERATURE

0° C to 40° C (32° F to 104° F)

STORAGE TEMPERATURE

-20° C to 65° C (-4° F to 149° F)

OPERATING HUMIDITY

10% to 90% non-condensing

STORAGE HUMIDITY

5% to 95% non-condensing

CERTIFICATIONS

FCC Class B, CE, IC, C-Tick

O.S. SUPPORT

Windows 2000, XP, Vista *

- * Vista support available in future driver update
- ¹ Maximum wireless signal rate derived from IEEE standard 802.11b, 802.11g and draft 802.11n specifications. Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead, lower actual data throughput rate. Environmental factors will adversely affect wireless signal range. Wireless range and speed rates are D-Link RELATIVE performance measurements based on the wireless range and speed rates of a standard Wireless 6 product from D-Link. Maximum throughput based on D-Link draft 802.11n devices.
- ² Computer must adhere to Microsoft's recommended System Requirements. This product is based on IEEE draft 802.11n specifications and is not guaranteed to be forward compatible with future versions of IEEE 802.11n specifications. Compatibility with draft 802.11n devices from other manufacturers is not guaranteed. All references to speed and range are for comparison purposes only. Product specifications, size and shape are subject to change without notice, and actual product appearance may differ from that depicted herein.

©2006 D-Link Corporation. All rights reserved. D-Link, the D-Link logo, RangeBooster N and Xtreme N are trademarks or registered trademarks of D-Link Corporation or its overseas subsidiaries. Other trademarks or registered trademarks are the property of their respective owners.



D-Link Worldwide Offices								
U.S.A	TEL: 1-800-326-1688	FAX: 1-866-743-4905	Spain	TEL: 34 93 409 0770	FAX: 34 93 491 0795	Pakistan	TEL: 92-21-454-8158	FAX: 92-21-453-5103
Canada	TEL: 1-905-8295033	FAX: 1-905-8295223	Portugal	TEL: 351 21 8688493		Israel	TEL: 972-9-9715700	FAX: 972-9-9715601
Europe, UK & Ireland	TEL: 44-20-8955-9000	FAX: 44-20-8955-9002	Greece	TEL: 30 210 9914 512	FAX: 30 210 9916902	Latin America	TEL: 56-2-5838-950	FAX: 56-2-5838953
Germany	TEL: 49-6196-77990	FAX: 49-6196-7799300	Czech Republic	TEL: 420 224 247 500		Brazil	TEL: 55-11-2185-9300	FAX: 55-11-2185-9322
France	TEL: 33 1 30 23 86 88	FAX: 33 1 30 23 86 89	Hungary	TEL: 36 (0) 1 461 30 00	FAX: 36 (0) 1 461 30 09	South Africa	TEL: 27-12-665-2165	FAX: 27-12-665-2186
Netherlands	TEL: 31-10-282-1445	FAX: 31-10-282-1331	Poland	TEL: 48 (0) 22 583 92 7	FAX: 48 (0) 22 583 92 76	Russia	TEL: 7-495-744-0099	FAX: 7-495-744-0099
Belgium & Luxemburg	TEL: 32(0)2 517 7111	FAX: 32(0)2 517 6500	Singapore	TEL: 65-6774-6233	FAX: 65-6774-63225	Japan	TEL: 81-3-5781-0963	FAX: 81-3-5781-0965
Switzerland	TEL: 41 (0) 1 832 11 00	FAX: 41 (0) 1 832 11 01	Australia	TEL: 61-2-8899-1800	FAX: 61-2-8899-1868	Korea	TEL: 82-2-890-5491	FAX: 82-2-890-549
Sweden	TEL: 46-(0)8564-61900	FAX: 46-(0)8564-61901	India	TEL: 91-22-2652 6696	FAX: 91-22-2652 8914	China	TEL: 86-10-58635800	FAX: 86-10-58635799
Denmark	TEL: 45-43-969040	FAX: 45-43-424347	Middle East (Dubai)	TEL: 971-4-391-6480	FAX: 971-4-390-8881	Taiwan	TEL: 886-2-6600-0123	FAX: 886-2-6600-3939
Norway	TEL: 47 99 300 100	FAX: 47 22 30 95 80	Egypt	TEL: 202-291-9035	FAX: 202-291-9051	Headquarters	TEL: 886-2-6600-0123	FAX: 886-2-6600-9898
Finland	TEL: 358-10 309 8840	FAX: 358-10 309 8841	Turkey	TEL: 90-212-289-5659	FAX: 90-212-289-7606			
Italy	TEL: 39-02-2900-0676	FAX: 39-02-2900-1723	Iran	TEL: 90-212-289-5659	FAX: 90-212-289-7606			