

Concept Lighting

D-Lite 2, D-Lite 4

D-Lite by Elinchrom

We live in a visual world, images instantly conveying information or reviving memories from the past.

Previously the almost exclusive domain of professional photographers, digital imaging has opened a world of creativity and self-expression to everyone who has the desire to experiment.

The quality of an image depends upon the control of light, heavy shadows giving an entirely different sensation from a soft romantic headshot.

Concept Lighting introduces lighting control, at a non-technical level, to everyone owning a digital camera. The "what you see is what you get" enables immediate changes and re-balancing of light and shadows.

The lightweight D-Lite units give freedom of lighting position with individual push button brightness control.



Concept Lighting...

D-Lite To Go

Each set contains two light sources with basic accessories to enable you to begin your adventure into creativity.

A **DVD Lighting Guide** takes you through the first steps and forms a basis for your own experiments with its many examples. When you feel the urge to explore lighting further, additional effect accessories are available.

Our aim was to create a low cost, state of the art, lighting system backed by the Elinchrom guarantee of excellence.

D-Lite is the result.

20801 / D-Lite To Go Set

includes two D-Lites 200 Ws

20802 / D-Lite To Go Set

includes two D-Lites 400 Ws

The set contains the accessories shown in the image.



Specifications

Elinchrom D-Lite	D-Lite 2 / 20481	D-Lite 4 / 20482
Ws / Joule	200	400
F-Stop	45.3	64.3
Power range f-stop	5	5
Power range Ws	12 - 200	25 - 400
Power adjustment	1/10 f-stop	
Recycling time, max. power	0.7 s	1.3 s
Recycling time at 110 V	0.8 s	1.6 s
Flash duration	1/1200 s	1/800 s
Power stabilisation	0.5%	
Auto Power Dumping	Applies power settings automatically	
Voltage	Multi voltage, 90-260 V	
Modelling lamp	100 W / E27	
Modelling lamp setting	Proportional, full, low, on/off	
Flashtube	Plug-in, user replaceable	
Umbrella fitting	Centred tube, for EL-umbrellas ø 7mm	
Sync voltage	5V compatibility with digital cameras	
Sync socket	3.5 mm jack	
Overvoltage & Temperature protection	All units	
Dimensions	21 x ø 16 cm	
Weight	1.1 kg	1.3 kg



Tolerances and specifications conform to IEC and CE standards. Technical data subject to change without notice. Please read the manual for details.

Conforming to all relevant EC norms, the level of security is unsurpassed. All functions are digitally controlled and power stability accurate to 0.5%.

Bi-voltage for use worldwide, super lightweight and robust for users who have a wish to produce images of high quality and not be limited to "flash on camera".

- 
- Handle
 - LED power display
 - Power control +/- 1/10 f-stop
 - Photocell on/off
 - Mains inlet socket, with included mains fuse
 - Umbrella tube for EL-umbrellas ø 7mm
 - Level tilt head
 - Fuse for modelling lamp
 - Test, open flash
 - Modelling lamp proportional/full/low/off
 - Photocell, for remote triggering
 - Charge ready beep on/off
 - Sync socket 3.5 mm jack
 - Illuminated mains switch on/off

Accessories



Reflector 18 cm and Grid

26060

For sharper shadows.
The grid limits light spread.



Umbrella Set

26062

Umbrellas spread the light.
Silver for „mid crisp“ shadow effects.
White „shoot through“ gives softer shadows.



Snoot and Grid

26061

Use together for “spot” lighting.
Note:


Can overheat when the modelling lamp is left switched on.
The overheat protection may switch off the unit.

Elinchrom have a full range of professional flash units and accessories. If your hobby becomes your business and you want to try „pro“, please visit www.elinchrom.com.

Concept Lighting



www.sfsdesign.com photos M. Camo

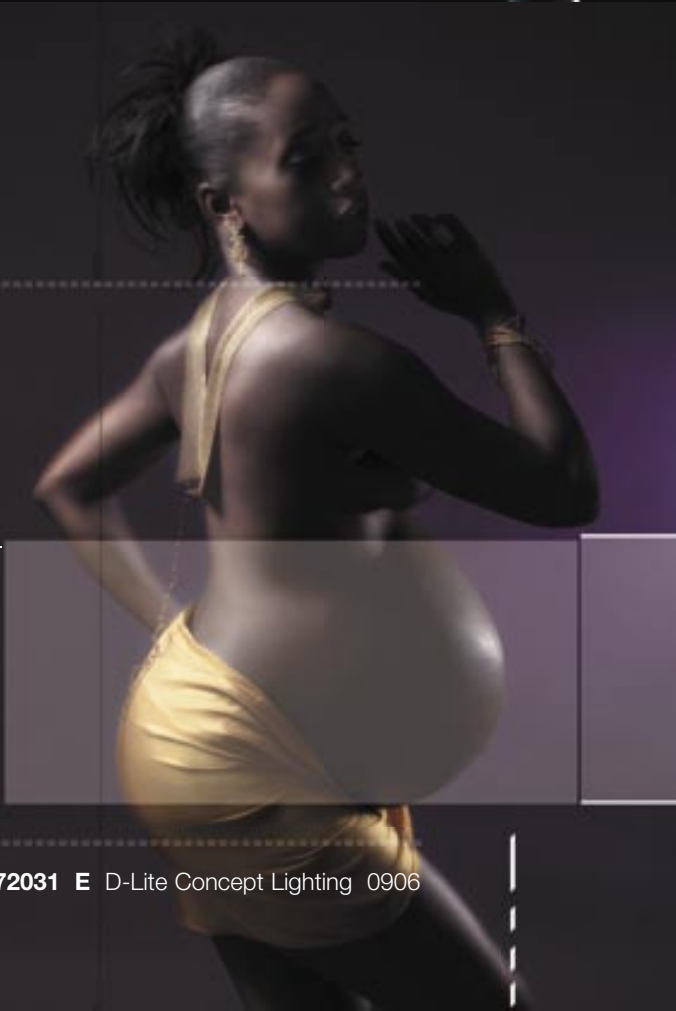

ELINCHROM HAS MANUFACTURED PRO-FLASH
FOR NEARLY 45 YEARS. WE HAVE A REPUTATION
FOR QUALITY AND HONESTY. WE HAVE DESIGNED
THESE LOW-COST D-LITES TO UPHOLD OUR SWISS
TRADITION OF EXCELLENCE. D-LITE HAVE A TWO-
YEAR WARRANTY.