Digiflash


The smalest lightmeter for flash and ambient light.


Another first from GOSSEN; the Digiflash is the first flashmeter to combine both analog and digital display in an ultra compact design.

Easy and comfortable to use, great for flash and ambient. Simlpy enter the desired sync speed, and trigger the flash. The Digiflash will display the resulting EV value measured in the LCD display. That value is then placed precisely under the red indicator. Read the required F-stop on the scale opposite your flash sync speed.

Digiflash Features:

- · Measurement of both flash and ambient light.
- · Incident and reflected measuring modes.
- · Microprocessor controlled.
- Digital LCD display in 1/3-stop increments.
- Contrast read-out in 1/3-stop increments.
- Storage of measured values
- Analog display of all suitable F-stops/shutter speed combinations.
- Over/Under range display.
- Automatic battery control
- Timerfunktion
- · Timer, clock, and alarm functions.
- Temperature measurement.



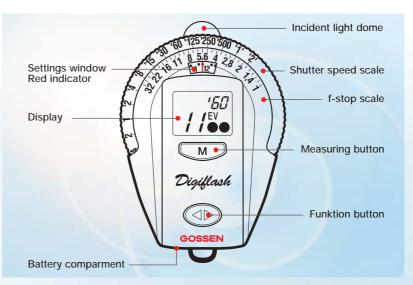


Meter Type	Digital Exposure Meter
Measuring modes	Ambient light
	Flash light (non cord)
	Incident light
	Reflected light Contrast measurement
Light sensor	sbc photo diode
Measuring range (at ISO 100/21°)	FV 0 to 18
Shutter speeds	t = 1/2000 sec to 4 min
Aperture/f-stops	f/1 to f/32
	f/2 to f/32
Measuring range flash (ISO 100/21°) Sync speeds	1 sec to 1/500 sec icl. 1/90 sec
Correction values	
3 3 1 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1	+/- 3,0
Film speeds	ISO 6 to 3200 in 1/3 increments
Measuring angle - Reflected light mode	approx. 25°
Timer	1 sec to 30 min
Watch	12 h or 24 h display, adjustable
Accuracy	5 min/year
Thermometer	adjustable to °C or °F
Measuring range	-15°C to 70°C or 5°F to 160°F
Accuracy	+/- 2°C or +/- 4°F
General data	
Display	Digital LCD-display and analouge scales
Battery	1x3 V Lithium battery CR 2032
Operating temp. range	-10°C to 60°C
Dimensions	approx. 75mm x 50mm x 23mm
Weight	approx. 40g incl. battery
Accessories included	Battery, carrying case,
	cord, instruction manual
Optional accessory	Mounting clip for camera shoes.
	At additional price, Order code V069A

GOSSEN

Foto- und Lichtmeßtechnik GmbH Thomas-Mann-Straße 16-20 D-90471 Nürnberg Telefon: 0911/8602-181 Telefax: 0911/8602-142 www.gossen-photo.de Printed in Germany • Subject to change without notice • 05.03








Digiflash Your passport to great exposures

The smallest lightmeter for flash and ambient light

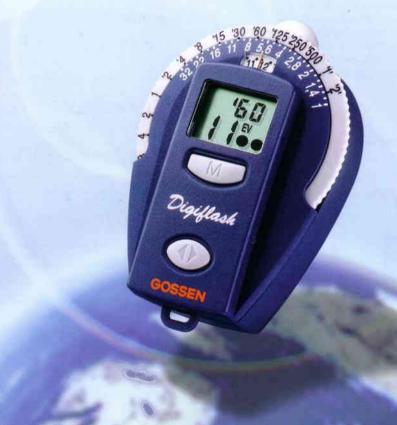

GOSSEN