



• Video Extender

- ➔ VE-150L/R video extender comprises a local transmitting unit and a remote receiving unit which are connected by standard Category 5 STP cables. The distance of both units can be extended up to 150m. It is ideal for factories and construction sites, or any location where the display may need to expose in a risky setting, but you want the system to be kept in a safe location.


I Features :

- Supports a local and a remote display.
- Uses economical, reliable Category 5 Ethernet cable to connect the local and remote units.
- Long distance transmission - up to 150m (500').
- 16 position adjustable video gain control to compensate for distance.
- Supports VGA, SVGA, XGA, SXGA and Multisync monitors.
- Supports DDC for the local monitor.
- Easy to install.
- OS Compatibility: WIN98, WIN ME, WIN 2K, WIN 2003, WIN XP, LINUX, Mac OS 8.6/9/10 and SUN Solaris 8/9.

I Package Content :

- 1x VE-150L (Local Unit)
- 1x VE-150R (Remote Unit)
- 2x Power Adapters
- 1x VGA Cable
- 1x User Guide

I Diagram :

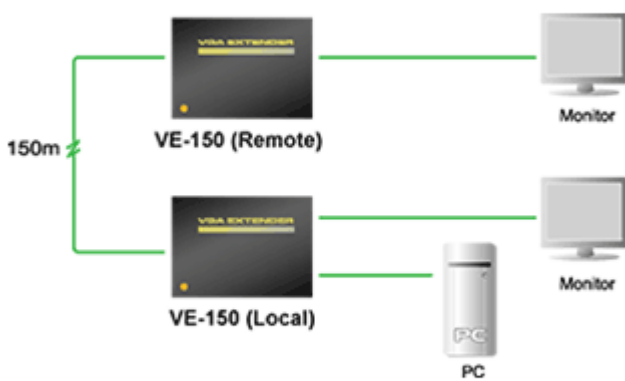

I Specification :

Function			VE-150L	VE-150R
Computer Connection			1	N/A
Connectors	Console	Video	1 x HDB-15 female (blue)	
	Computer	Video	1 x HDB-15 male (blue)	N/A
	Link		1 x RJ-45 socket	
	Power		1 x DC jack	
Switch	Video Gain		N/A	1 x 16 position switch
LEDs	Power		1 (Orange)	
Cable Length			150m [500'] (max.)	
Resolution			1280x1024, 60Hz DDC, DDC2, DDC2B*	
Power Consumption			1.2W	
Operation Temperature			0~50°C	
Storage Temperature / Humidity			-20°C~60°C (0~80% RH, NC)	
Housing			Metal	
Weight			0.25kg	
Dimensions (L x W x H)			11.9 x 8.6 x 2.3 cm	