

The Roll-keyboard cannot be used in below conditions.

- It cannot be contacted the sharp object.
- It cannot be contacted the oil or the organic impregnate like acetone and toluol etc.



- It cannot be pressed when it was rolled.



- Cannot places the heavy object on it in long time.



- It cannot be putted into the oven and putted on the fire to roast.



- We cannot put out strength to twist or pull it.



* Material

- Made by high-quality silicone, the keyboard has no poisonous and evil smell, according to the requirment of the environmental protection, it is a kind of creative new product.

* Anti-pollution

- In view of the fact it is all seal completely, preventing all kinds of germs and pollutants exting into the keyboard, and the keyboard's surface can be washed and disinfected any time, so it can prevent the disease infection.

* Watertightness

- It can be used for a damp environment, even inside shallow water. It can be normally used when beverage or other liquids spilled at the keyboard.

* Acid and alkaline-proof

- The keyboard can be used safely in acid or alkaline environment.

* High dustproof

- The keyboard can be used safely in dust fog and even in sandstorm.

* Carrying convenience


- Because the keyboard can be rolled up, so it can save lots of spaces while carrying.

* Other characteristics

- The special printing technology guarantees the letter on the buttons of keyboard not to be worn away for a long time.
- Feeling soft comfortable.
- Soft without any sound while typing.
- Various beautiful colors; The button bears to type 2 million times.
- The keyboard is applicable to office; hospital Classroom; workshop; network bar; laboratory; kid room; notebook PC; army; etc.

* SPECIFICATION

- | | |
|--|--|
| ● Compatinility : IBM Windows98/2000/Me/XP | ● Compatinility : IBM Windows98/2000/Me/XP |
| ● Commvnication : USB, PS/2, USB+PS/2 | ● Commvnication : USB, USB+PS/2 |
| ● Layout : 109keys | ● Layout : 85keys |
| ● Dimension(mm) : 495(L)X138(W)X12(H) | ● Dimension(mm) : 350(L)X135(W)X12(H) |
| ● Electronic data : +5V DC \pm % @ 250mA | ● Electronic data : +5V DC \pm % @ 250mA |
| ● Tatal travel: 2mm \pm 4 | ● Tatal travel: 2mm \pm 4 |
| ● Weight(kg) : 0.20 | ● Weight(kg) : 0.18 |

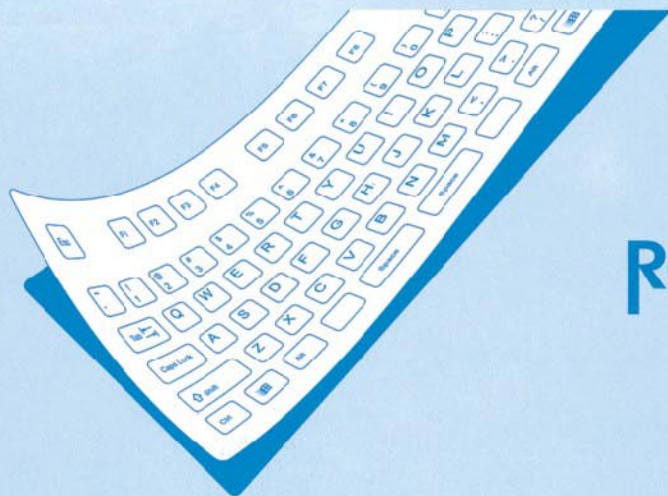

Roll Keyboard [Manual] *

