PAGE	1 OF 1

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
Jimmy	Jimmy	RELEASE TO PRODUCTION	2006.05.15	A.0

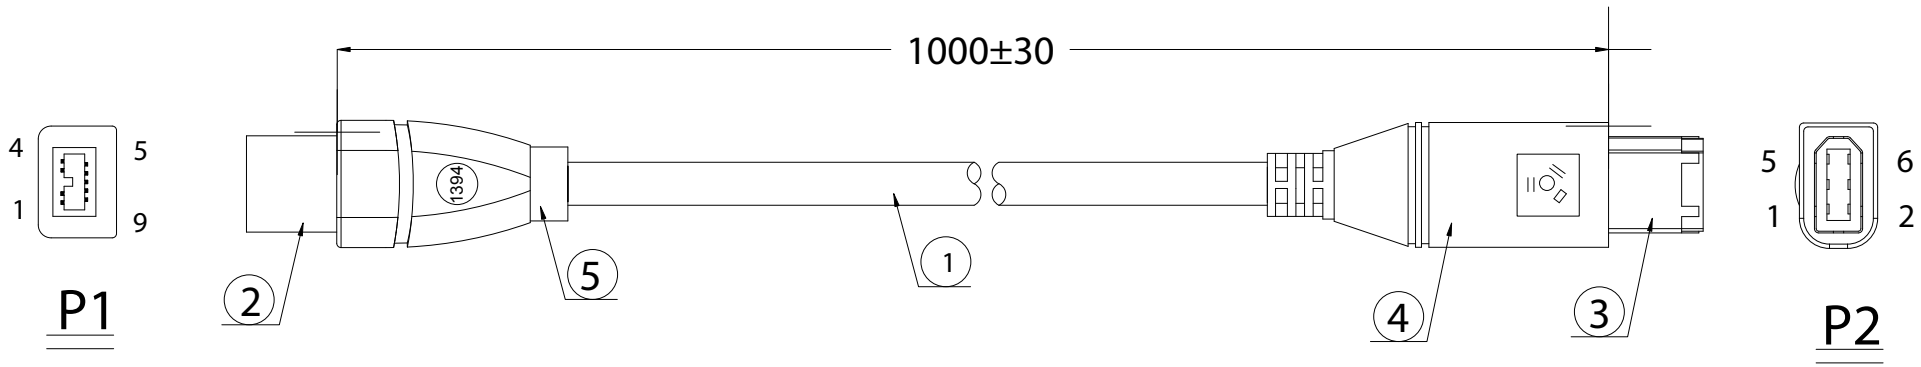

PIN OUT

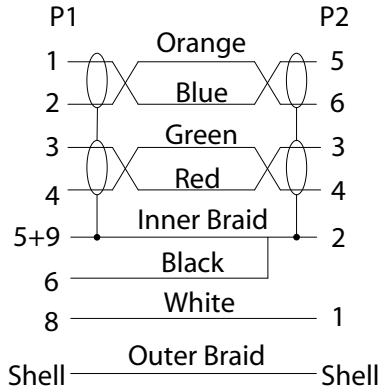

Notes:

1.Electrical Test:

(1.1).100% Open Short and Miss Wire Test.

(1.2).Insulation Resistance:DC300V/0.01S 10M ohm MIN.

(1.3).Conduct Resistance:5ohm MAX.

2.ROHS Standard

NO.	PARTS NO.	Parts Name	Specification	Q`TY
⑤		Outer Mold	45P PVC Color:Gray(424C)	1PC
④		Outer Mold	45P PVC Color:Gray(424C)	1PC
③		IEEE1394 6P/M	Insulation:Black,Nickel Plated,.Black Plastic Cover,Solder Type	1SET
②		IEEE1394 9P/M	Insulation:Black,Shell Nickel Plated,Solder Type	1SET
①		Cable	UL20276[28AWG*1P+AB]*2+22AWG*2C+Myalr+AB OD:6.0mm Color:Black	1PC

APPROVED	CHECKED	DRAWN	CUSTOMER:	SWEDELTACO
			ITEM NO.	FW-81-K
			DRAW NO.	CB043-C132
			UNIT	mm
			SCALE	NONE

DESCRIPTION:

IEEE 1394 9P/M - IEEE 1394 6P/M

DELTACO