
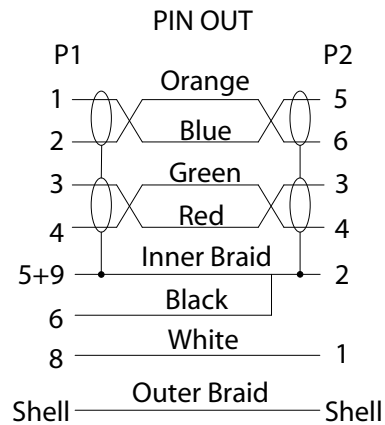


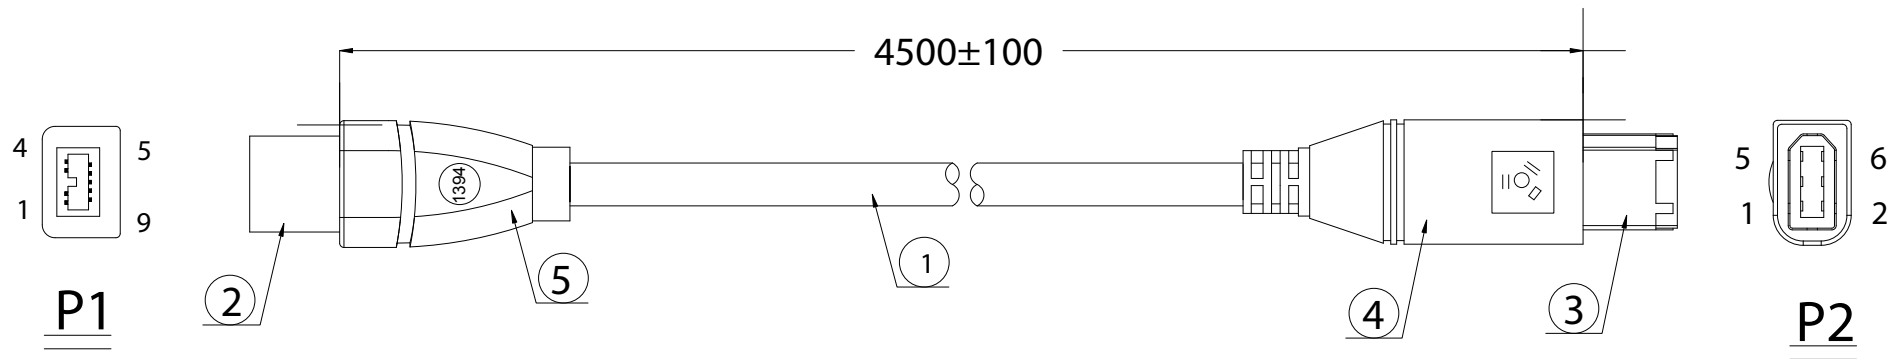

Notes:

1.Electrical Test:

(1.1).100% Open Short and Miss Wire Test.

(1.2).Insulation Resistance:DC300V/0.01S 10M ohm MIN.

(1.3).Conduct Resistance:5ohm MAX.

2.ROHS Standard

⑤	Outer Mold	45P PVC Color:Gray(424C)	1PC	
④	Outer Mold	45P PVC Color:Gray(424C)	1PC	
③	IEEE1394 6P/M	Mnsulation:Black,Nickel Plated,.Black Plastic Cover,Solder Type	1SET	
②	IEEE1394 9P/M	Mnsulation:Black,Shell Nickel Plated,Solder Type	1SET	
①	Cable	UL20276[30AWG*1P+AB]*2+26AWG*2C+Myalr+AB OD:5.0mm Color:Black	1PC	
NO.	PARTS NO.	Parts Name	Specification	Q`TY

APPROVED	CHECKED	DRAWN	CUSTOMER:	SWEDELTACO	DESCRIPTION: IEEE 1394 9P/M - IEEE 1394 6P/M	
			ITEM NO.	FW-84-K		
			DRAW NO.	CB043-C135		
			UNIT	mm		
			SCALE	NONE		