
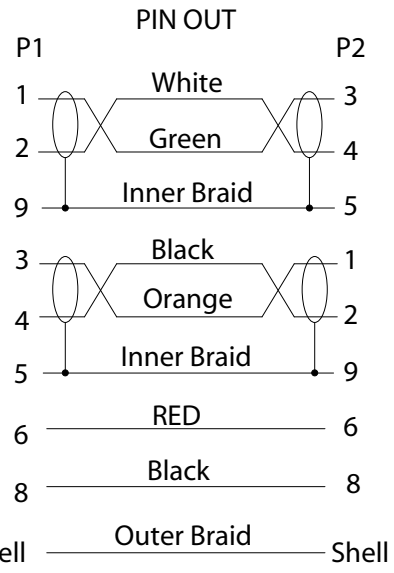


BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
Jimmy	Dayi	RELEASE TO PRODUCTION	2006.05.15	A.0

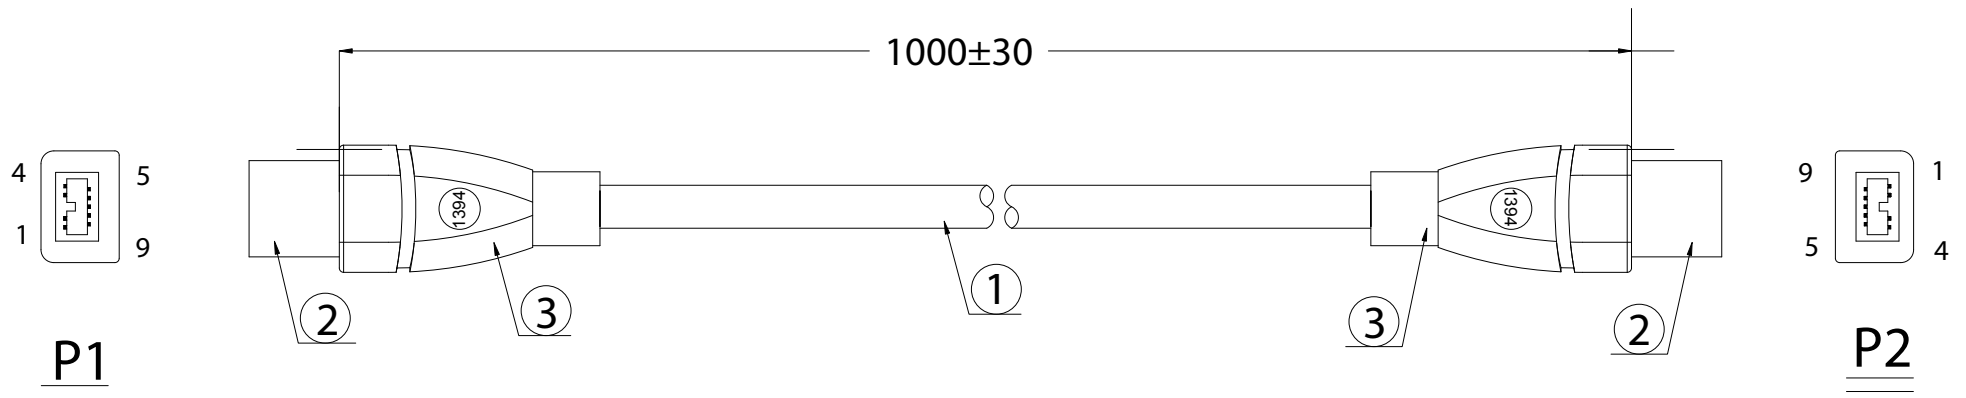

Notes:
 1.Electrical Test:
 (1.1).100% Open Short and Miss Wire Test.
 (1.2).Insulation Resistance:DC300V/0.01S 10M ohm MIN.
 (1.3).Conduct Resistance:5ohm MAX.
 2.ROHS Standard

③	Outer Mold	45P PVC Color:Gray(424C)	2PCS
②	IEEE1394 9P/M	Insulation:Black,Shell Nickel Plated,Solder Type	2SET
①	Cable	UL20379 [30AWG*1P+AD]*2C+26AWG*2C+Myalr+AB OD:5.0mm Color:Black	1PC
NO. PARTS NO.	Parts Name	Specification	Q'TY

APPROVED	CHECKED	DRAWN	CUSTOMER:	SWEDELTACO
			ITEM NO.	FW-71-K
			DRAW NO.	CB043-C128
			UNIT	mm
			SCALE	NONE

DESCRIPTION:
 IEEE 1394 9P/M - IEEE 1394 9P/M

