
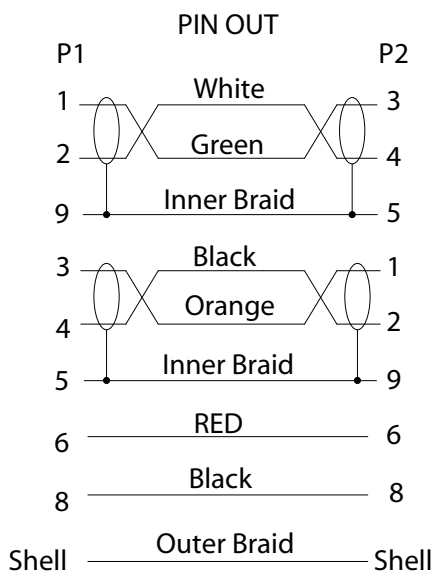


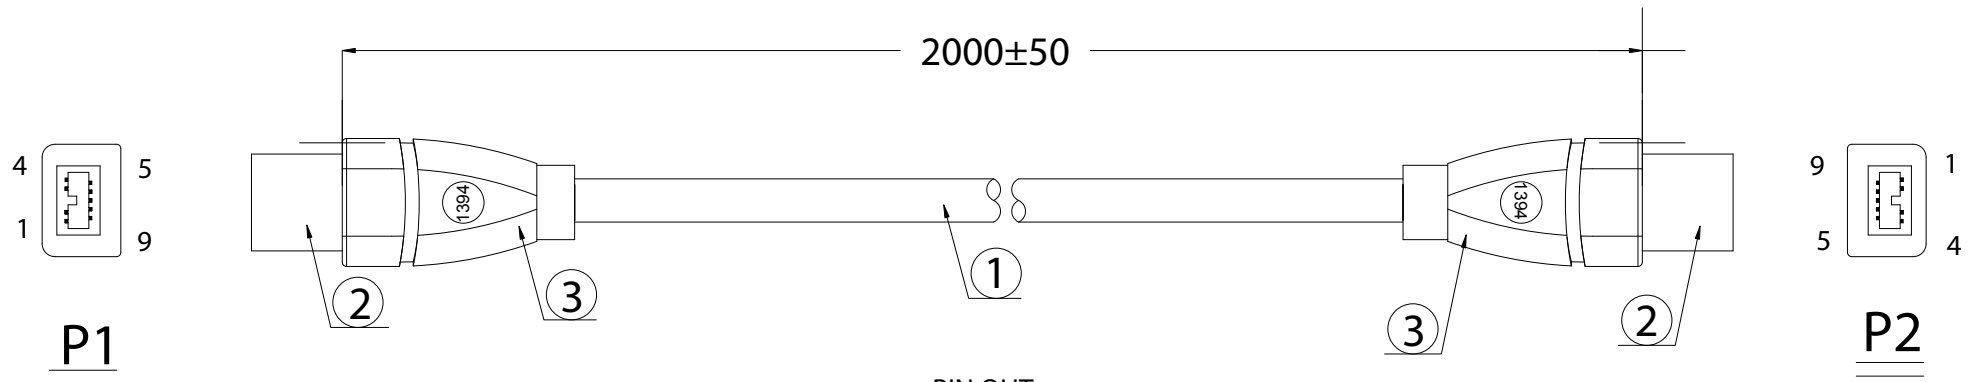

Notes:

1.Electrical Test:

(1.1).100% Open Short and Miss Wire Test.

(1.2).Insulation Resistance:DC300V/0.01S 10M ohm MIN.

(1.3).Conduct Resistance:5ohm MAX.

2.ROHS Standard

③		Outer Mold	45P PVC Color:(424C)	2PCS
②		IEEE1394 9P/M	Insulation:Black,Shell Nickel Plated,Solder Type	2SET
①		Cable	UL20379 [30AWG*1P+AD]*2C+26AWG*2C+Myalr+AB OD:5.0mm Color:Black	1PC
NO. PARTS NO.		Parts Name	Specification	Q`TY

APPROVED	CHECKED	DRAWN	CUSTOMER:	SWEDELTACO	DESCRIPTION:	
			ITEM NO.	FW-72-K		
			DRAW NO.	CB043-C129		
			UNIT	mm		
			SCALE	NONE		
					IEEE 1394 9P/M - IEEE 1394 9P/M	