



BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
Jimmy	Dayi	INITIAL RELEASE	2006.10.11	A.0

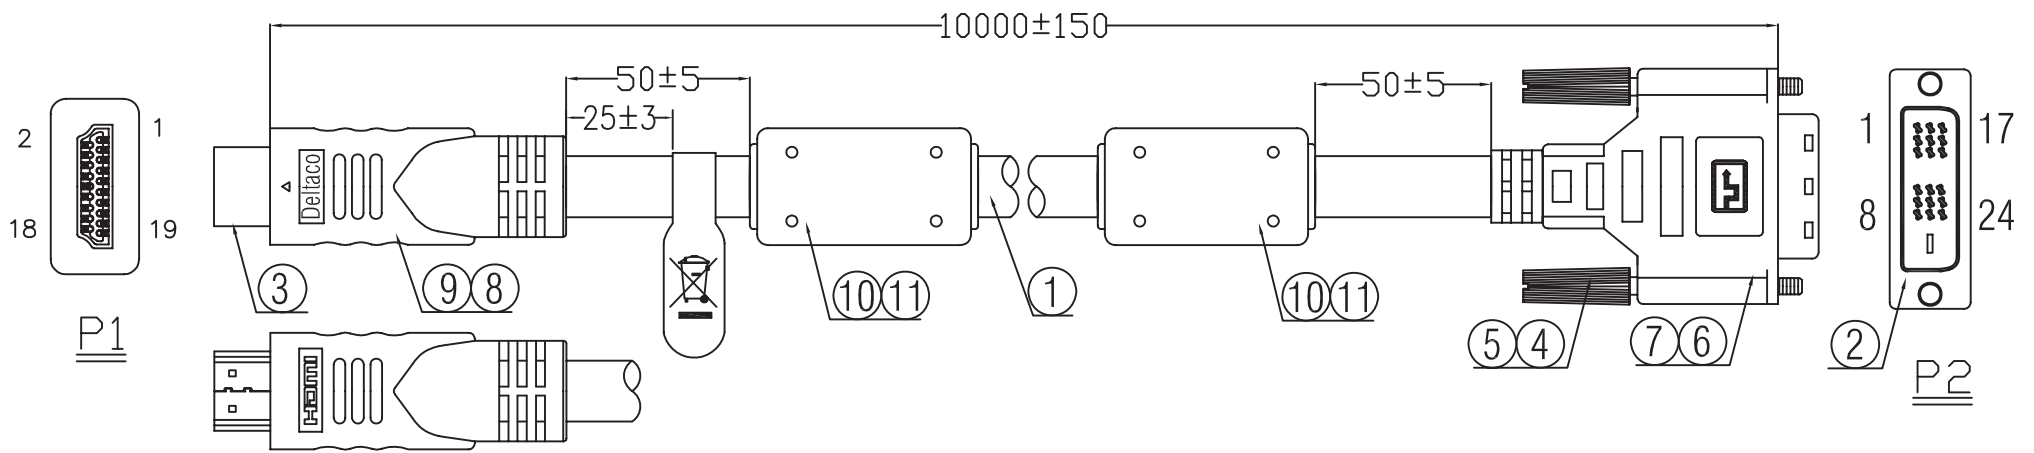

PIN OUT

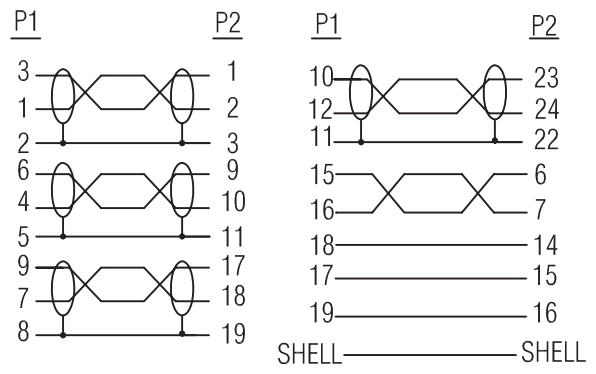

Notes:
 1.Electrical Test:
 (1.1).100% Open Short and Miss Wire Test.
 (1.2).Insulation Resistance:DC300V, 10M ohm MIN.
 (1.3).Conduct Resistance:5ohm MAX.
 2.ROHS Standard

⑪	Core Mold	PVC Color:Black	2PCS
⑩	Core	ID:9.5*OD:17.5*L:28.5mm	2PCS
⑨	Outer Mold	PVC Color:Black	1PC
⑧	Inner Mold	PE	1PC
⑦	Outer Mold	PVC Color:White	1PC
⑥	Inner Mold	PE	1PC
⑤	Screw Mold	PVC Color:White	2PCS
④	Screw	NO.4-40UNC-2A, Gold Plated	2PCS
③	HDMI19P/M	Insulator Color:Black,Shell:Gold Plated	1PC
②	DVI(18+1)P/M	Insulator Color:Black,Shell:Gold Plated	1PC
①	Cable	UL20276 (1P*26AWG + D + FREE-EDGE + AL)*4C + 26AWG*1P + 26AWG*5C + AEB OD:8.5mm PVC JACKET COLOR:BLACK	1PC

NO.	PARTS NO.	Parts Name	Specification	Q`TY
-----	-----------	------------	---------------	------

APPROVED	CHECKED	DRAWN	CUSTOMER:	SWDELTAO
			ITEM NO.	HDMI-117-K
			DRAW NO.	CB043-C184
			UNIT	mm
			SCALE	NONE

DESCRIPTION:
HDMI19P/M-DVI(18+1)/M

