

master view™

2 Port DVI KVM Switch


Control 2 DVI/-PS/2 computers from one DVI monitor, one PS/2 keyboard, PS/2 mouse

Digital

Digital media
output from
2 sources



Diagram

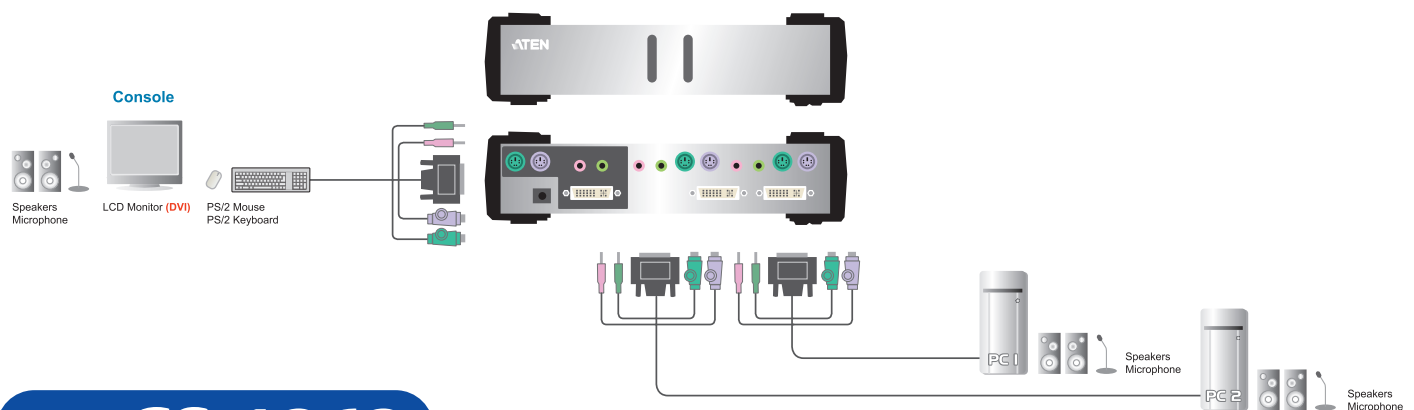

Model: **CS-1262**

Features

- Control two computers from one DVI monitor, one PS/2 keyboard, one PS/2 mouse console
- DVI interface technology to ensure crisp and clean digital and analog display
- Audio Enabled
- Bi-directional switching and flexible interoperability: switch permits independent PC, and audio functions
- Supports PS/2 keyboards and mice including Microsoft IntelliMouse (Pro), Explorer and Optical mice
- Supports 1600 x 1200 high resolution, DDC2B
- Computer selection via LED push button and Hotkeys
- 2 DVI-D KVM Cables included

Specifications

Function			CS-1262
Computer Connections			2
Computer Port Selection			Push buttons, Hotkeys
Audio Port Selection			Hotkeys
Connectors	Console	Keyboard	1 x mini din 6 female (Purple)
		Video	1 x DVI-I female (White)
		Mouse	1 x mini din 6 female (Green)
		Audio	1 x stereo earphone jack female (Green) 1 x microphone jack female (Pink)
	Computer	Keyboard	2 x mini din 6 female (Purple)
		Video	2 x DVI-I female (White)
		Mouse	2 x mini din 6 female (Green)
		Audio	2 x stereo earphone jack female (Green) 2 x microphone jack female (Pink)
	Power Adapter		1 x DC Jack
	LEDs	On Line	2 (Orange)
Selected		2 (Green)	
Button	Port Selection	2 x Push button	
Keyboard / Mouse Emulation			PS/2
VGA Resolution			1600 x 1200; DDC2B
Power Consumption			DC5.3V, 1.35W
Scan Interval			5 seconds (default)
Operation Temperature			0~50℃
Storage Temperature			-20℃~60℃
Humidity			0~80% RH, Noncondensing
Housing			Metal
Weight			700g
Dimension			200 x 74.5 x 42 mm