



1	2	3	4	5	6
		LTR	RevNo	Revision note	Date
					Signature
					Cherked

(P1)
DB9 FEMALE
INSULATOR:BLUE



②


MOLDED TYPE
COLOR: BEIGE
41

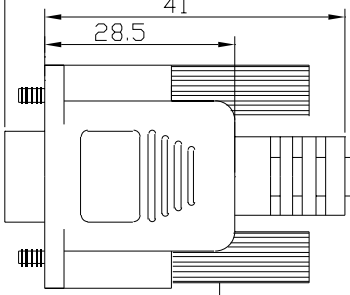

③


①

MOLDED TYPE
COLOR: BEIGE




③

(P2)
DB9 FEMALE
INSULATOR:BLUE



②

5000±30MM

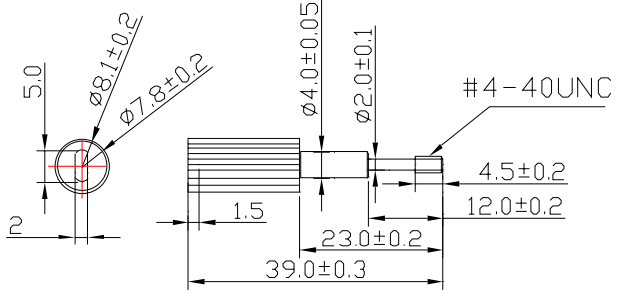

CONFIGURATION:

(P1) DB9F	(P2) DB9F
1	7
7	1
2	3
3	2
4	6,8
6,8	4
5	5
9	9
SHIELD	SHIELD

NOTES:

- TEST: OPEN/SHORT, 100% TEST
- TOTAL LENGTH: 5000±30MM

3.	THUMBSCREW	4	#4-40UNC TYPE COLOR BEIGE
2.	CONNECTOR	2	DB9 FEMALE MOLDED TYPE
1.	CABLE	1	#30 NO-UL 8C+1, W/O BRAID, BEIGE PVC JACKET O.D: 4.0MM
NO	PART NAME	Q'TY	SPECIFICATION

RANGE	0-10	11-25	26-40	41-60	61-80	81-100	X
TOLERANCE(±)	0.10	0.15	0.20	0.25	0.30	0.35	2%
TITLE:		Buyer	Date	Scale	Unit	Rev.	Dwg.no
DB9 F/DB9 F MOLDED TYPE		DEL	03.19.2009	1/1	MM	2.0	DEL-25B
DRN BY	CHK BY	APE BY					